

Close Type High Pressure Hydraulic Quick Coupling



ZJ-TC (High pressure Series)

Close Type Super High Pressure Quick Coupling Series couplings features :

- 1.Positive valve stop, the perch maintains valve alignment and provides metal to metal valve stop to ensure that the valves open fully, every time.
- 2.Precision machined valves with electrometric seal provide for

positive shut-off upon disconnection.

3.Hardened nipples and sleeves and solid barstock construction make for a quality coupling with maximum resistance to damage from hydraulic and mechanical shock.

4.Durable ball-locking mechanism assures reliable connection every time. A large number of locking balls distributes and work load evenly while providing alignment and swiveling action to reduce hose torque and prolong hose life. CAUTION: These products are not to be used as swivels; rotation under pressure will result in excessive and premature wear.


5.Small diameter mating seal helps keep separating forces to a minimum, allowing for easier connect and disconnect at pressure up to 5000 PSI.

6.Sleeve locking mechanism prevents accidental disconnection when coupling is dragged along the ground.

7.Compatible with PARKER TC Series.

Specification:

Size (inch)	Code	Rated Pressure (Mpa)	Rated Flow (L/min)	Temperature Range (° C)
		Carbon Steel		
3/8	03	69	23	NBR : -20~100

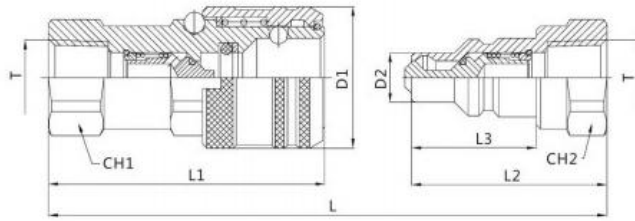

PART No .	ISO	L	L1	L2	L3	D1	D2	CH1	CH2	T		
ZJ-TC-SP	DN10	79	62.5	44	28.2	32	11.2	24	24	ZG3/8	G3/8	NPT3/8