

ZJ-YCA 钢球式液压快速接头(ISO5675)

ZJ-YCA BALL VALVES TYPE HYDRAULIC QUICK COUPLING (ISO5675)



两端开闭式

Valve in both socket and plug



特征



ZJ-YCA 系列接头具有以下特征:

接头断开时, 阀芯自动闭合, 防止泄漏。
接头连接后, 阀自动开启, 在额定工作范围内, 始终保持流体的畅通。
阀采用坚硬的铬合金钢球。钢球被弹簧加载以使牢固的固定在阀座上。
阀提供钢球与内锥面之间的金属对金属密封。
关键部件经过感应淬火, 所以耐用性好。
可靠的球锁机构将相匹配的两半部分结合在一起。
母插座和公插头采用实心的棒料精密制造。
本接头符合ISO5675标准。
并于下列产品互换:美国派克 (PARKER) 4000系列、意大利快事达 (FASTER) AV/NS系列。

Features




ZJ-YCA Series couplings:

The valve plug can automatically close to prevent leakage when couplings are disconnected.
The valve plug can automatically open to let fluid get through when couplings are connected.
The valve is a hard chromium alloy ball which is connected with a spring to fix on the valve seat.
the valve provides a metal-to-metal seal between the ball and coined aeat.
Critical parts are hardened for durability.
Durable ball-locking mechanism holds the mating halves together.
Socket and plug are precision machined from solid bar stock.HANSEN HK Series
These couplings reach ISO5675 standard.
Compatible with PARKER 60 Series, FASTER HNV Series, AEROQUIP FD45 Series and HANSEN HK Series

订货编号:
Part Number:

主体材质	碳 钢 Steel
	不 锈 钢 Stainless steel
	黄 铜 Brass

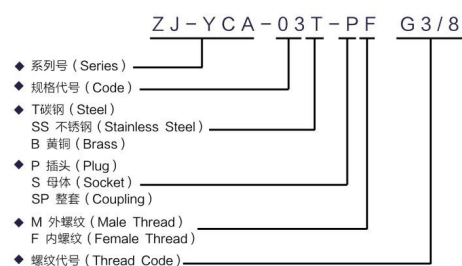

应用

Applications



ZJ-YCA系列广泛应用于各种工业所需的连接, 主要用于建筑设备、森林设备、液压机具、钢铁设备及其他所需的液压应用。



The ZJ-YCA Series quick coupling widely apply for the industrial joint, such as construction equipment, forestry equipment, hydraulic tools, oil equipment, steel mill machinery, and other industry required hydraulic connection.

规格(英寸) Body Size(in)	规格代号 Code	额定压力 (MPa) / Rated Pressure(MPa)			额定流量 (L/min) Rated Flow(L/min)	温度范围 (丁腈橡胶) / 温度范围 (氟橡胶) Temperature Range(NBR) / Temperature Range(FKM)	
		碳钢 Steel	不锈钢 Stainless Steel	黄铜 Brass			
1/4	02	34.5	13.8	7	11.5	-20℃~+100℃	-20℃~+180℃
3/8	03	27.6	13.8	7	23	-20℃~+100℃	-20℃~+180℃
1/2	04	27.6	10.4	7	45.5	-20℃~+100℃	-20℃~+180℃
3/4	06	20.7	10.4	7	106	-20℃~+100℃	-20℃~+180℃
1	08	20.7	7	7	190	-20℃~+100℃	-20℃~+180℃