

# ZJ-YAB 开闭式液压快速接头(ISO7241-1A)

ZJ-YAB CLOSE TYPE HYDRAULIC QUICK COUPLING (ISO7241-1A)



## 特征



ZJ-YAB 系列接头具有以下特征:

接头断开时, 阀芯自动闭合, 防止泄漏。	Poppet valves are available to prevent uncoupled leakage.
接头连接后, 阀自动开启, 在额定工作范围内, 始终保持流体的畅通。	Poppet valves open automatically when coupled, within rated working pressure, to keep the flow.
关键部件经过感应淬火, 所以耐用性好。	Key parts are induction hardened for a better durability.
可靠的球锁机构将相匹配的两半部分结合在一起。	Function reliable ball-lock system combines 2 marched half parts together.
母插座和公插头采用实心的棒料精密制造。	Male coupling and female coupling are machined from solid steel bar stock.
本接头符合ISO7241-1A标准。	These couplings reach ISO7241-1A standard.
并于下列产品互换: 美国派克 (PARKER) 6600系列、意大利快事达 (FASTER) ANV系列、美国爱力克 (AEROQUIP) 5600系列、美国汉森 (HANSEN) HA15000系列。	The same function and can interchange following foreign products: PARKER 6600 Series, FASTER ANV Series, AEROQUIP 5600 Series and HANSEN HA15000 Series.

## Features




ZJ-YAB Series couplings:

Poppet valves are available to prevent uncoupled leakage.	Poppet valves open automatically when coupled, within rated working pressure, to keep the flow.
Key parts are induction hardened for a better durability.	Function reliable ball-lock system combines 2 marched half parts together.
Male coupling and female coupling are machined from solid steel bar stock.	These couplings reach ISO7241-1A standard.
The same function and can interchange following foreign products: PARKER 6600 Series, FASTER ANV Series, AEROQUIP 5600 Series and HANSEN HA15000 Series.	

订货编号:  
Part Number:

主体材质	碳 钢 Steel
	不 锈 钢 Stainless steel
	黄 铜 Brass

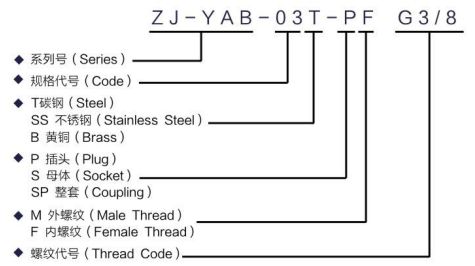

## 应用

## Applications



ZJ-YAB系列广泛应用于各种工业所需的连接, 主要用于建筑设备、森林设备、液压机具、石油设备、钢铁设备及其他所需的液压应用。



The ZJ-YAB Series are widely used for coupling in industrial fields, such as construction equipment, forest equipment, hydraulic machine tools, petroleum equipment, steel equipment and other hydraulic equipment or tools.

规格(英寸) Body Size(in)	规格代号 Code	额定压力 (MPa)    Rated Pressure(MPa)			额定流量 (L/min) Rated Flow(L/min)	温度范围 (丁腈橡胶)    温度范围 (氟橡胶) Temperature Range(NBR)    Temperature Range(FKM)	
		碳钢 Steel	不锈钢 Stainless Steel	黄铜 Brass			
1/4	02	34.5	13.8	7	11.5	-20℃~+100℃	-20℃~+180℃
3/8	03	27.6	13.8	7	23	-20℃~+100℃	-20℃~+180℃
1/2	04	27.6	10.4	7	45.5	-20℃~+100℃	-20℃~+180℃
3/4	06	20.7	10.4	7	106	-20℃~+100℃	-20℃~+180℃
1	08	20.7	7	7	190	-20℃~+100℃	-20℃~+180℃