

ZJ-YCT 推拉式液压快速接头(ISO5675)

ZJ-YCT PUSH AND PULLTYPE HYDRAULIC QUICK COUPLING (ISO5675)



Valve in both socket and plug



特征



ZJ-YCT 系列接头具有以下特征:

在接头被夹紧或以舱壁形式安装时, 双作用套筒可以用单手操作
接头断开时, 阀芯自动闭合, 防止泄漏。
接头连接后, 阀自动开启, 在额定工作范围内, 始终保持流体的畅通。
关键部件经过感应淬火, 所以耐用性好。
可靠的球锁机构将相匹配的两半部分结合在一起。
母插座和公插头采用实心的棒料精密制造。
本接头符合ISO5675标准。
并于下列产品互换: 美国派克 (PARKER) 4250系列、意大利快事达 (FASTER) CPV-CNV系列。

Features




ZJ-YCT Series couplings:

Double acting sleeve for one handed push-to-connect operation when coupler is clamp or bulk-head mounted.
Poppet valves available to prevent uncoupled leakage.
Poppet valves open automatically when coupled, within rated working pressure, to keep the flow expedite.
Critical parts are hardened for durability.
Durable ball-locking mechanism holds the mating halves together.
Socket and plug are precision machined from solid bar stock.
These couplings reach ISO5675 standard.
Compatible with PARKER 4250 Series, FASTER CPV-CNV Series.

订货编号:

Part Number:

主体材质	碳 钢 Steel
	不锈钢 Stainless steel
	黄 铜 Brass

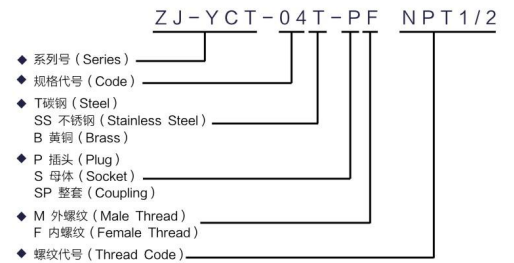

应用

Applications



ZJ-YCT系列广泛应用于各种工业所需的连接, 主要用于建筑设备、森林设备、液压机具、石油设备、钢铁设备及其他所需的液压应用。



The ZJ-YCT Series are widely used for coupling in industrial fields, such as construction equipment, forest equipment, hydraulic machine tools, petroleum equipment, steel equipment and other hydraulic equipment or tools.

规格(英寸) Body Size(in)	规格代号 Code	额定压力 (MPa) Rated Pressure(MPa)			额定流量 (L/min) Rated Flow(L/min)	温度范围 (丁腈橡胶) 温度范围 (氟橡胶) Temperature Range(NBR) Temperature Range(FKM)	
		碳钢 Steel	不锈钢 Stainless Steel	黄铜 Brass			
1/2	04	27.6			45.5	-20℃~+100℃	-20℃~+180℃