



ZJ-LB 螺纹式液压快速接头 (黄铜)
ZJ-LB THREAD LOCKED TYPE HYDRAULIC QUICK COUPLING (BRASS)

 两端开闭式
Valve in both socket and plug



特征	Features
	
ZJ-LB 系列接头具有以下特征:	ZJ-LB Series couplings:
重型翼型母装配牢固, 特别能经受住通常用于上紧或松开接头的锤子敲击。	Heavy-duty wing-type nut is ruggedly built. It can withstand the hammer blows caused by tighten or loosen the coupler.
组合阀密封件使接头可以在满压力下连接及断开, 而不会造成密封件被冲蚀。	Assembled valve seal permits the coupling connect or disconnect at full pressure while the seal will not washout.
平齐端面阀机构将夹气及溢流保持在最小值。	The flush face valve keeps air and spillage to a minimum.
抗腐蚀黄铜材质使接头可与大范围的介质兼容并提供。	Corrosion resistant brass material make the coupling be compatible with a wide range of media.
并于下列产品互换: 美国派克 (PARKER) 6100 系列、意大利快事达 (FASTER) FB 系列、美国爱力克 (AEROQUIP) 5100 系列、美国汉森 (HANSEN) 96 系列。	Compatible with PARKER 6100 Series, FASTER FB Series, AEROQUIP 5100 Series and HANSEN 96 Series TGW Series

订货编号: 主体材质 黄铜 Brass
Part Number:

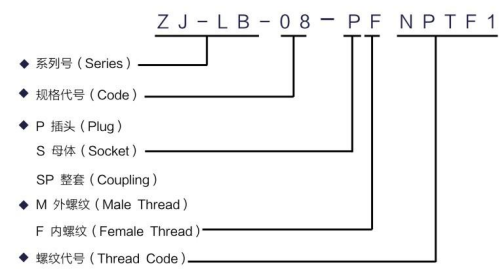

应用
Applications







 ZJ-LB系列通过螺纹连接的接头可用于较大范围的工作应用, 这类应用需要能在压力下连接的重型接头, 而且溢流很少或没有溢流。
ZJ-LB系列可理想地用于连接设备上的液压系统, 例如电动夹, 转轴及移动钻机。它还广泛用于自卸车以连接拖车与湿式液压系统。其他使用包括: 浸没式泵, 发动机试验台及许多其他需要在压力下连接的高流量接头应用。

 ZJ-LB series is thread connecting coupling which is widely used in various applications. It can be connected under pressure but cause less spillage, even non-spillage.
ZJ-LB series is suitable to connect the hydraulic lines in the machine like power tongs, swivels and mobile drillings. It is also widely used in dump trucks to connect the trailer and wet line hydraulic system. Besides, it is applied for submersible pumps, engine test stands as well as the equipment required connecting under high pressure or high liquid transfer.

规格(英寸) Body Size(in)	规格代号 Code	额定压力 (MPa) Rated Pressure(MPa)			额定流量 (L/min) Rated Flow(L/min)	温度范围 (丁腈橡胶) 温度范围 (氟橡胶)	
		碳钢 Steel	不锈钢 Stainless Steel	黄铜 Brass		Temperature Range(NBR)	Temperature Range(FKM)
1	08			20.7	189	-20℃~+100℃	-20℃~+180℃
1-1/4	10			20.7	189	-20℃~+100℃	-20℃~+180℃

ZJ-LB 螺纹式液压快速接头 (黄铜)
ZJ-LB THREAD LOCKED TYPE HYDRAULIC QUICK COUPLING (BRASS)

 两端开闭式
Valve in both socket and plug

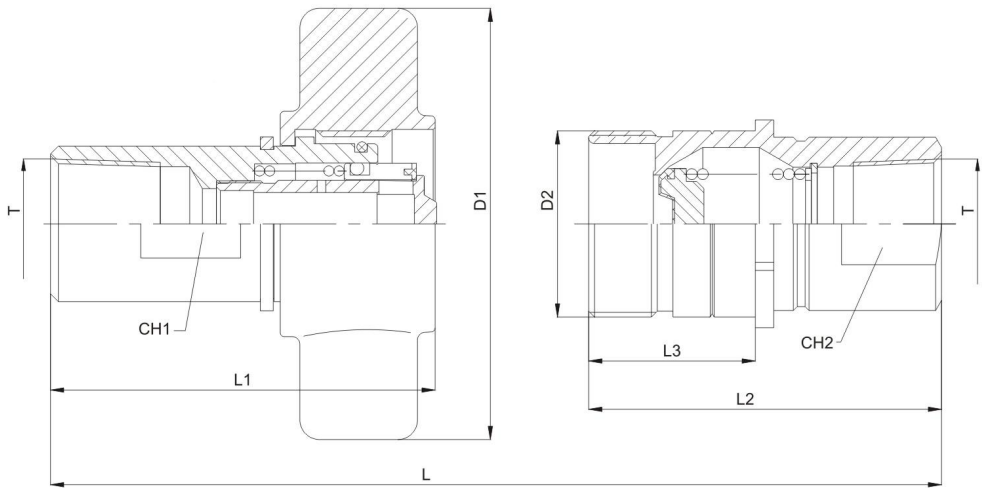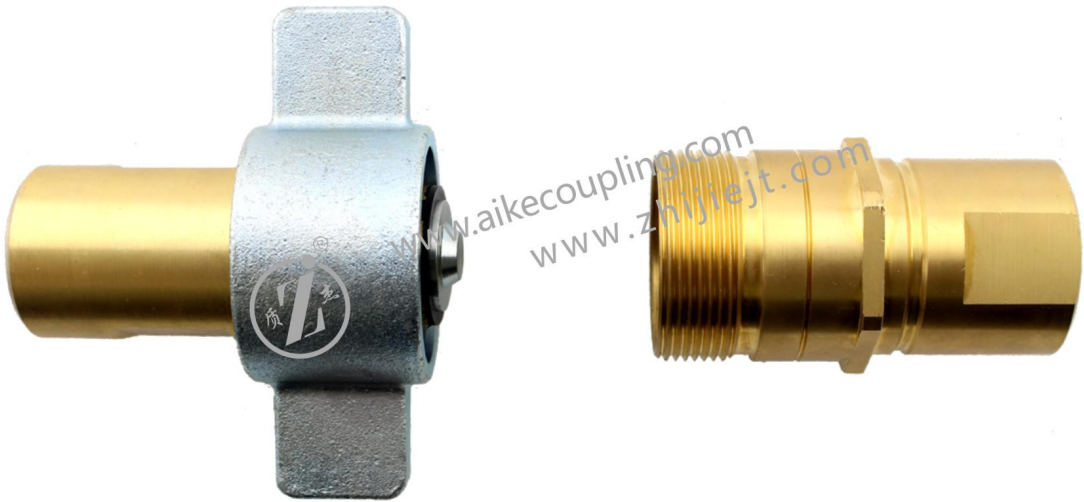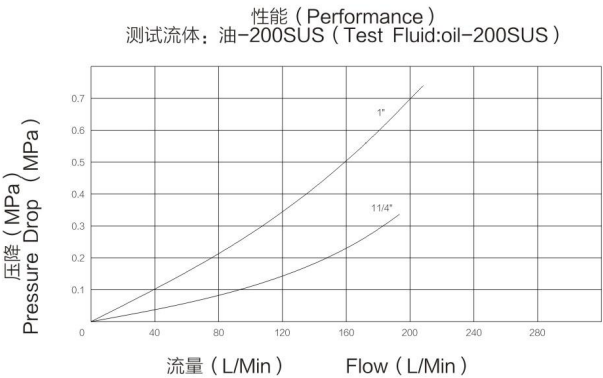

PART NO.	ISO	L	L1	L2	L3	D1	D2	CH1	CH2	T
ZJ-LB-08-SP	DN25	157	98	90	42.5	110	1-7/8-12UN	36	39.5	ZG1 G1 NPTF1
ZJ-LB-10-SP	DN31.5	165	105.5	94	44.5	132	2-1/8-12UN	45	48	ZG1-1/4 G1-1/4 NPTF1-1/4